

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 24 TOWNSHIP 17 RANGE 2

DATE: 5-9-05

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison :3" spacer cap



METHOD OF ESTABLISHMENT: County: 4-13-00

IN. S.P.C. E ZONE NAD '83

NAME: 17022404

N: 516958.6670(m)

E: 49274.1520(m)

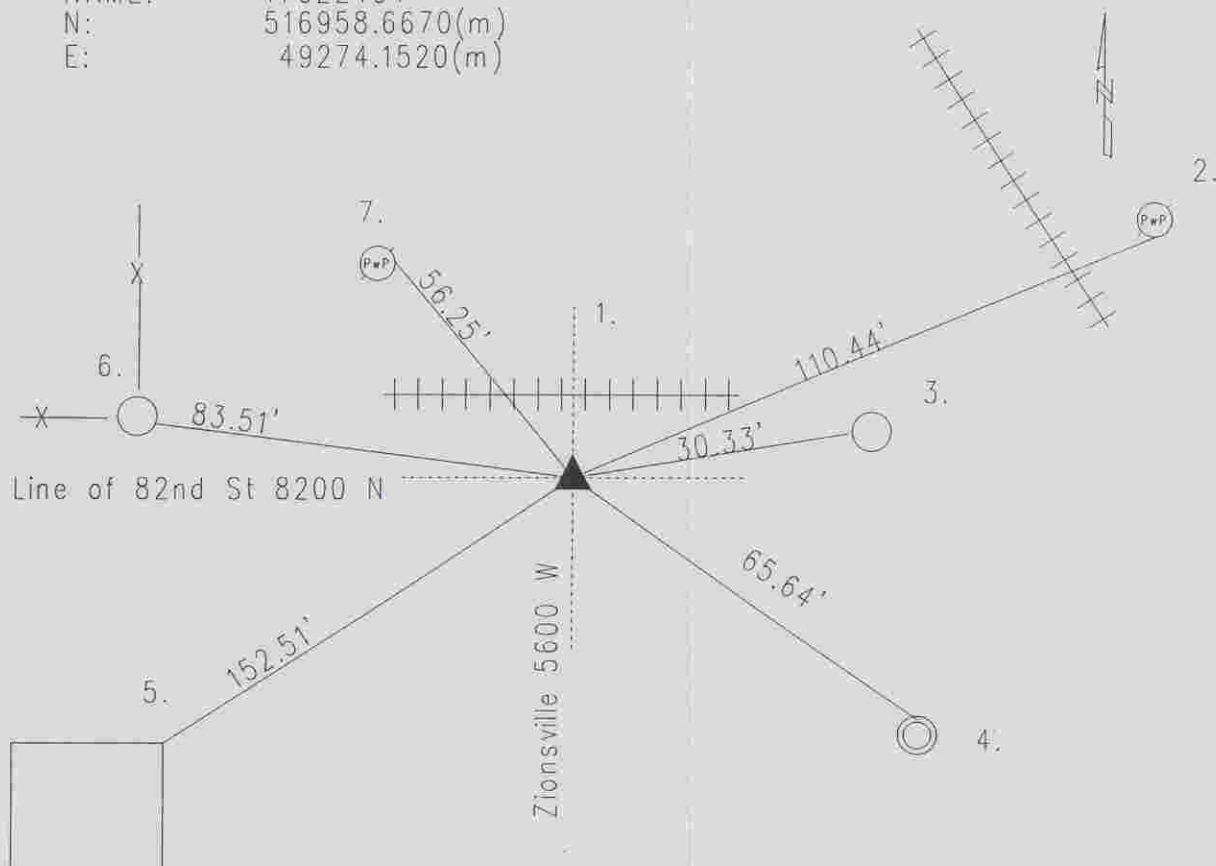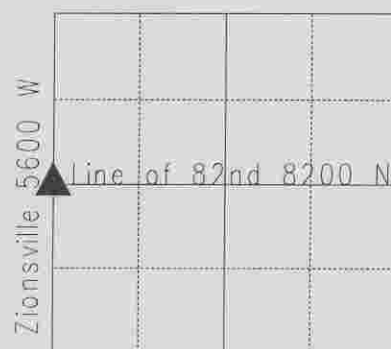

Original post set 1821 by Laughlin with witness: 6" beech S 60 E 9 links; 13" ash S 85 W 31 links per Marion County Atlas pg. 4. Hosbrook 8-5-1851 called stone set per Pike Township Legal Survey book pg. 19. 1-23-64 called road nail. 8-13-73 called boat spike. Excavated 7-24-87 stone found 9" down. Stone broken off. Harrison set. Re-tied 4-13-00 by Wilcoxon. Re-tied 5-9-05.

17022404

REF.	DISTANCE	DESCRIPTION
1.	16.5'	Due N to C/I of Railroad tracks
2.	110.44'	Small PK nail S PwP# 36' up
3.	30.33'	Cut 'x' W concrete railroad crossing sign base
4.	65.64'	Cut 'x' N telephone manhole
5.	152.51'	NE corner of building
6.	83.51'	Face of corner fence post 6' chain link
7.	56.25'	Mag nail w/brass washer F PwP#13-195-B 18" up